


● Model and Model Number representing

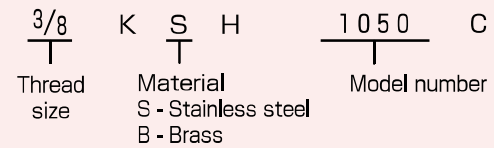

● Standard type model number list

Thread size	Model	Model number	Minimum orifice diameter [mm]	Flow rate [L/min] at following pressure [MPa]								Spray angle at following pressure [MPa]					
				0.05	0.1	0.2	0.3	0.5	0.7	1.0	1.5	0.1	0.2	0.3	0.5	1.0	1.5
$\frac{3}{8}$	KSH	0550	1.1	2.0	2.9	4.1	5.0	6.5	7.6	9.1	11.2	35°	44°	50°	57°	62°	63°
		0650	1.2	2.4	3.5	4.9	6.0	7.7	9.2	11.0	13.4	35°	44°	50°	57°	62°	63°
		0750	1.4	2.9	4.0	5.7	7.0	9.0	10.7	12.8	15.7	35°	44°	50°	57°	62°	63°
		0850	1.5	3.3	4.6	6.5	8.0	10.3	12.2	14.6	17.9	35°	44°	50°	57°	62°	63°
		1050	1.7	4.1	5.8	8.2	10.0	12.9	15.3	18.3	22.4	35°	44°	50°	57°	62°	63°

**EVERLOY**

<https://www.everloy-spray-nozzles.com>