


● Standard type model number list

● : Model availability

Thread size	Model		Model number	Minimum orifice diameter [mm]	Flow rate [L/min] at following pressure [MPa]							Spray angle at 0.3 MPa
	Male	Female			0.01	0.1	0.2	0.3	0.5	0.7	1.0	
	KSRC	KSRC···H										
3/8	●	●	1090	1.9	4.9	6.2	8.4	10.0	12.5	14.4	16.8	90° × 45°
	●	●	1590	2.2	6.9	9.4	12.6	15.0	18.7	21.6	25.2	90° × 45°
1/2	●	●	2090	2.5	9.3	12.5	16.8	20.0	24.9	28.8	33.6	90° × 45°
	●	●	2590	2.8	11.6	15.6	21.0	25.0	31.1	36.0	42.0	90° × 45°

■ Performance data

Flow distribution along long side

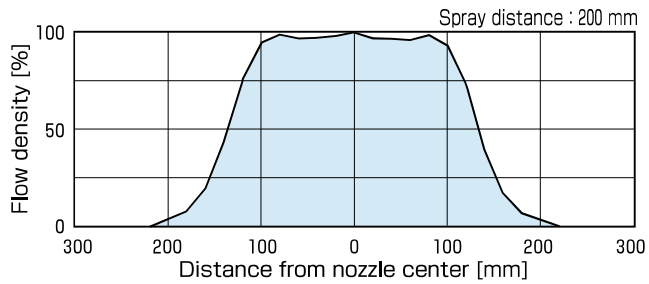

Flow distribution along short side

