


● Standard type model number list

● : Model availability


Model					Model number	Minimum orifice diameter [mm]	Flow rate [L/min] at following pressure [MPa]								Spray angle at following pressure [MPa]	
DNEX	DNX	DNH DNR	DNK	DNM			1	10	15	20	25	30	40	50	15	50
		●	●	●	0325	1.5	5.7	18.0	22.0	25.5	28.5	31.2	36.0	40.2	27°	28°
		●	●	●	0332	1.4	5.7	18.0	22.0	25.5	28.5	31.2	36.0	40.2	35°	36°
		●	●	●	0340	1.3	5.7	18.0	22.0	25.5	28.5	31.2	36.0	40.2	43°	44°
●	●	●	●	●	0425	1.7	7.6	24.0	29.4	33.9	37.9	41.6	48.0	53.7	27°	28°
●	●	●	●	●	0432	1.6	7.6	24.0	29.4	33.9	37.9	41.6	48.0	53.7	35°	36°
●	●	●	●	●	0440	1.5	7.6	24.0	29.4	33.9	37.9	41.6	60.0	53.7	43°	44°
●	●	●	●	●	0525	1.9	9.5	30.0	36.8	42.4	47.4	52.0	60.0	67.1	27°	28°
●	●	●	●	●	0532	1.8	9.5	30.0	36.8	42.4	47.4	52.0	60.0	67.1	35°	36°
●	●	●	●	●	0540	1.7	9.5	30.0	36.8	42.4	47.4	52.0	72.0	67.1	43°	44°
●	●	●	●	●	0625	2.1	11.4	36.0	44.1	50.9	56.9	62.4	72.0	80.5	27°	28°
●	●	●	●	●	0632	2.0	11.4	36.0	44.1	50.9	56.9	62.4	72.0	80.5	35°	36°
●	●	●	●	●	0640	1.9	11.4	36.0	44.1	50.9	56.9	62.4	84.0	80.5	43°	44°
●	●	●	●	●	0725	2.3	13.3	42.0	51.4	59.4	66.4	72.7	84.0	93.9	27°	28°
●	●	●	●	●	0732	2.2	13.3	42.0	51.4	59.4	66.4	72.7	84.0	93.9	35°	36°
●	●	●	●	●	0740	2.1	13.3	42.0	51.4	59.4	66.4	72.7	90.6	93.9	43°	44°
●	●	●	●	●	0825	2.5	14.3	45.3	55.5	64.1	71.6	78.5	90.6	101	27°	28°
●	●	●	●	●	0832	2.3	14.3	45.3	55.5	64.1	71.6	78.5	90.6	101	35°	36°
●	●	●	●	●	0840	2.2	14.3	45.3	55.5	64.1	71.6	78.5	108	101	43°	44°
●	●	●	●	●	0925	2.6	17.1	54.0	66.1	76.4	85.4	93.5	108	121	27°	28°
●	●	●	●	●	0932	2.5	17.1	54.0	66.1	76.4	85.4	93.5	108	121	35°	36°
●	●	●	●	●	0940	2.4	17.1	54.0	66.1	76.4	85.4	93.5	108	121	43°	44°
●	●	●	●	●	1125	3.1	21.4	67.7	82.9	95.7	107	117	135	151	27°	28°
●	●	●	●	●	1132	2.8	21.4	67.7	82.9	95.7	107	117	135	151	35°	36°
●	●	●	●	●	1140	2.7	21.4	67.7	82.9	95.7	107	117	135	151	43°	44°
●	●	●	●	●	1325	3.2	24.5	77.5	94.9	110	123	134	155	173	27°	28°
●	●	●	●	●	1332	3.1	24.5	77.5	94.9	110	123	134	155	173	35°	36°
●	●	●	●	●	1340	2.9	24.5	77.5	94.9	110	123	134	155	173	43°	44°
●	●	●	●	●	1525	3.5	28.6	90.5	111	128	143	157	181	202	27°	28°
●	●	●	●	●	1532	3.3	28.6	90.5	111	128	143	157	181	202	35°	36°
●	●	●	●	●	1540	3.2	28.6	90.5	111	128	143	157	181	202	43°	44°
●	●	●	●	●	1825	3.8	34.2	108	132	153	171	187	216	241	27°	28°
●	●	●	●	●	1832	3.6	34.2	108	132	153	171	187	216	241	35°	36°
●	●	●	●	●	1840	3.4	34.2	108	132	153	171	187	216	241	43°	44°
●	●	●	●	●	1925	3.9	35.7	113	138	160	179	196	226	253	27°	28°
●	●	●	●	●	1932	3.7	35.7	113	138	160	179	196	226	253	35°	36°
●	●	●	●	●	1940	3.6	35.7	113	138	160	179	196	226	253	43°	44°
●	●	●	●	●	2325	4.3	43.0	136	167	192	215	236	272	304	27°	28°
●	●	●	●	●	2332	4.1	43.0	136	167	192	215	236	272	304	35°	36°
●	●	●	●	●	2340	3.9	43.0	136	167	192	215	236	272	304	43°	44°

● Model and Model Number representing



■ Performance data

Widthwise impact force distribution

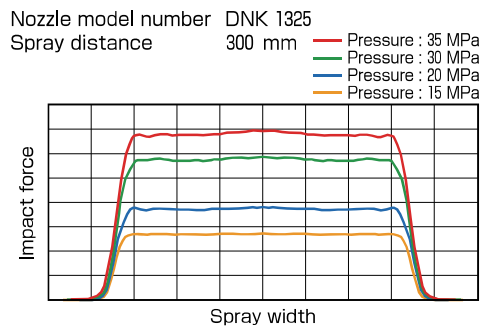

Example of overlap spray pattern

